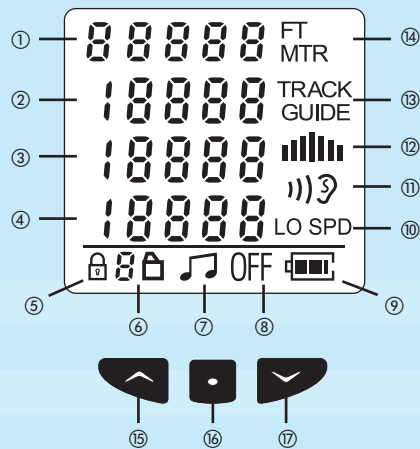


QUATTRO

INSTRUCTION MANUAL



LARSEN & BRUSGAARD
www.L-and-B.dk



- ① 1st warning altitude (Altitude/Altitude offset)
- ② 2nd warning altitude (1st low speed alarm)
- ③ 3rd warning alarm (2nd low speed alarm)
- ④ 4th warning alarm (3rd low speed alarm)
- ⑤ Perform ACCESS
- ⑥ Warning bank
- ⑦ Pitch status
- ⑧ OFF
- ⑨ Battery status
- ⑩ Low speed status
- ⑪ Alarm sounds
- ⑫ Pitch status
- ⑬ Track Guide Status
- ⑭ FT/MTR
- ⑮ Up
- ⑯ Mode
- ⑰ Down

WARRANTY

The following conditions apply to the QUATTRO warranty:

Within 12 months after delivery, damage or defects in the unit that are proven to be caused by faulty manufacture will be repaired by LARSEN & BRUSGAARD at no cost to the end user.

To make a claim under this warranty, send the unit to an authorized dealer or directly to LARSEN & BRUSGAARD together with the dated purchase invoice or receipt. The warranty becomes void if damage is caused by external circumstances or if the unit has been serviced or repaired by third parties unauthorized by our national agents or LARSEN & BRUSGAARD.

All further claims, especially for defects after skydiving accidents, are excluded. LARSEN & BRUSGAARD has no obligation to honor any extension of warranty granted by any national agent.

Waiver of Liability

The buyer and user of the QUATTRO indemnify the manufacturer and vendor from any liability for damage incurred before, during and after skydiving with the instrument.

WARNING!

The QUATTRO is intended to be a backup device and must not be relied upon as your primary means of maintaining altitude awareness. Use the QUATTRO at your own risk.

Do not put the QUATTRO directly next to your ear when testing the alarm sounds on the ground, as the QUATTRO alarm volume is very loud. It may cause pain or damage to the ear.

Due to outside wind noise in freefall, the alarm sounds will not be perceived to be as loud as when testing the QUATTRO on the ground.

If the QUATTRO is not mounted correctly, you may not hear the alarm sounds in freefall. Make sure the QUATTRO is mounted correctly before you jump. The QUATTRO must be active (powered on) prior to entering the airplane.

INTRODUCTION

Congratulations on purchasing your new QUATTRO!

The QUATTRO audible altimeter is the latest in micro technology and features the most advanced programming for accurately measuring freefall & canopy descent rates. The QUATTRO allows the skydiver four sets of warning altitudes for high speed and three for low speed flight. This provides added interactivity in configuring frequently used warning alarms. The QUATTRO can also be set up to three climb warning alarms for the ultimate in precision altitude awareness.

NEW!! The QUATTRO raises the bar yet again to provide skydivers with the most accurate and useful functions available in an audible altimeter:

- Four high-speed warnings:

Allows settings up to 19990 Feet and can be used for Bigway formations, wingsuit flight setup and other precision skydives where four high-speed warnings are needed and desired.

- Track Guide:

0.5 second pulsating tones between the 1st and 2nd warnings help keep track of altitude separation of tracking groups or waves.

- Three canopy descent and low speed warnings:

The Canopy Descent Alerts are essentially low speed alerts and can also be used by wingsuit flyers to keep track of altitude in preparation for separation and canopy deployment.

The QUATTRO is fully automatic and can be manually turned off or on as well. The QUATTRO continually reads ambient air pressure for real-time accuracy and attention to ground level.

The QUATTRO's small and ergonomic design provides the user with comfort & less bulk when used inside a soft or hard-shell helmet. Rigging materials are included for those wishing to mount the audible on the outside of a helmet.

The QUATTRO is specifically designed for advanced skydiving disciplines: Bigways, Formation Skydiving, Freeflying, Wingsuit Flying, Student, Tandem, AFF, and also canopy related activities such as accuracy and CRW.

QUATTRO sets the standard as being the most advanced audible altimeter available with more features, greater accuracy and the ability to finely tune your altitude awareness.

For further information or to ask questions about QUATTRO or any other L&B altitude awareness instrument, please visit our website and our Product Support Forum at www.L-and-B.dk.

INSTRUCTIONS

Power ON

The QUATTRO has been powered off prior to shipping from our factory. To turn the power ON, press and hold any key until the unit beeps, then release the key. The QUATTRO runs a self-test and sounds three beeps as it flashes the screen three times. It then displays a screen configuration referred to henceforth as the "Main Window". This represents the starting point for all further actions with respect to QUATTRO actions and subsequent displays.

NOTE: To save battery power, the screen display will switch OFF after 14 hours. However, the unit is still ready to jump.

Performing ACCESS

Performing ACCESS can be done in the:

- 1) Climb to Altitude Warnings and Altitude Offset Window
- 2) High Speed Warnings and Setup Selector Window
- 3) Canopy Descent and Low Speed Warnings Window

1. Press and release quickly – the padlock icon turns off (disappears)
2. When the padlock icon reappears, immediately press and keep it pressed – the padlock icon will disappear again
3. When the padlock icon appears again, release immediately

NOTE: The QUATTRO goes out of ACCESS and back to the Main Window if no button has been pressed within 5 sec. ALL functions (except Power ON) can be performed ONLY when the QUATTRO is in ACCESS mode.

Menu Function Sequence

By repeatedly pressing the QUATTRO scrolls through the menu functions in the selected window:

To leave a menu function, wait until the display times out, or, press and hold for 5 sec., or, press repeatedly until the padlock icon flashes, then press or to exit.

High Speed Warnings and Setup Selector

Perform ACCESS in the High Speed Warnings and Setup Selector Window.

Warning Bank Menu Functions

The QUATTRO has four freefall warning banks. When the warning bank icon is flashing, press or to select warning bank 1 to 4.

Setting the Warning Altitudes

The setting of altitudes in each warning bank can be performed either on the ground or in the airplane during climb to jump altitude.

Four Warning Alarms

1. Press until 1st warning altitude flashes
2. Press or to change 1st warning altitude
3. Press again and the 2nd warning altitude flashes
4. Press or to change 2nd warning altitude
5. Press again and the 3rd warning altitude flashes
6. Press or to change 3rd warning altitude
7. Press again and the 4th warning altitude flashes
8. Press or to change 4th warning altitude

Sequence of Warning Alarm Altitudes

You may note that when setting the warning altitudes, it is possible to set the 1st warning alarm altitude lower than the second or even the 4th warning altitudes. The 2nd warning altitude could be set to a higher value than the 1st warning altitude or a lower value than the 3rd warning altitude, and so on. This is not a problem – when the QUATTRO exits ACCESS mode, it will automatically sort and store the warning alarms such that the highest warning altitude becomes the 1st warning alarm, the next highest warning altitude becomes the 2nd warning alarm, and the lowest warning altitude becomes the 4th warning alarm.

Three Warning Alarms

You can choose to only have three warning alarms. The procedure is the same as above, but choose same altitude for the 1st and 2nd warning alarms (the QUATTRO then sounds only the 2nd, 3rd and 4th warning alarms).

NOTE: Track Guide is then disabled.

Two Warning Alarms

You can choose to only have two warning alarms. The procedure is the same as above, but choose same altitude for the 1st, 2nd and 3rd warning alarms (the QUATTRO then sounds only the 3rd and 4th warning alarms).

One Warning Alarm

If you want only one warning alarm, choose same altitude for all four warning alarms using the above procedure. (The unit sounds only the 4th warning alarm).

Track Guide

Press again.

Explanation:

When Track Guide is activated, a series of 0.5 second beeps sound between the 1st and 2nd high speed warning.

To enable Track Guide

Press repeatedly until Track Guide flashes. Press or until the Track Guide icon is ON.

To disable Track Guide

Press repeatedly until Track Guide flashes. Press or until the Track Guide icon is OFF.

NOTE: When Track Guide is enabled, the Track Guide icon will show in the warning bank area of all warning bank displays and in the Main Window.

Sound Volume

Press again.

Four output values will begin to flash.

Press or to select output volume for all four high-speed warnings.

"1" is very low volume (112 dB), "10" is very high volume (117 dB)

The QUATTRO is factory preset to "7".

NOTE: In case of low battery battery capacity the volume will automatically switch to "1" and it cannot be changed until the batteries have been replaced.

Sound Volume Track Guide

Press again.

One output value will begin to flash.

Press or to select output volume for Track Guide. "1" is very low volume (112 dB), "10" is very high volume (117 dB)

The QUATTRO is factory preset to "3".

NOTE: In case of low battery capacity the volume will automatically switch to "1" and it cannot be changed until the batteries have been replaced.

Sound Pitch

Press again.

The musical note icon and pitch bar graph will begin to flash.

Press or to change the pitch up or down. The pitch bar graph will display the number of bars corresponding to the selected pitch and the selected pitch will sound.

Note: When selecting a pitch on either side of the center vertical bar (3,800 Hz), the output volume decreases about 5 dB because the speaker is no longer at its optimum resonance frequency.

Test Warning Sounds

Press again.

The ear icon will begin to flash.

Press or .



This causes the QUATTRO to sound the preset alarm sequence at the selected pitch.

INSTRUCTION MANUAL

REV: 1.0






Ledreborg Alle 28
4000 • Roskilde • Denmark
+45 46 48 24 80 • Fax • +45 46 48 24 90
www.L-and-B.dk • L-and-B@L-and-B.dk




If Track Guide is enabled, the Track Guide will simulate “real-time” based on the difference between 1st and 2nd warning at speed 120mph (176 feet/sec) or 193 km/h (54 m/sec). To stop the Test Warning Sounds, press  or .

NOTE: In case of low battery capacity the volume will automatically switch to “1” and it cannot be changed until the batteries have been replaced.

Feet/Meters

Press  again. The FT or MT indicator located in the altitude area of the Main Window will begin to flash. Press  or  to switch between feet (FT) or meters (MT).

Power OFF

The QUATTRO can be manually powered OFF to further extend the battery life time when not in use. Press  again. The OFF icon in the icon area of the Main Display will begin to flash. Press and hold  and  until the display flashes, then release. The QUATTRO switches OFF. Customer settings (except altitude offset) are stored in nonvolatile memory when the QUATTRO is powered OFF. When powered OFF, the QUATTRO cannot be used for jumping.


Canopy Descent and Low Speed Warnings Selector

Description

The QUATTRO includes three canopy low speed warning sounds (short beeps sound when passing through one, two or three selectable altitudes) which can be selected to sound while under canopy descent or during wing suit flight.

Setting Canopy Descent Warnings

NOTE: Minimum selectable height is 100 ft (30 meters) Note: Default values 1200 ft., 900 ft., and 600 ft. have been factory preset for Canopy Descent Warning altitudes.

In the Main Window mode, press  to access the Canopy Descent Selector. In this window perform ACCESS.










Warning Bank Menu Functions

The QUATTRO has four canopy descent warning banks. When the warning bank icon is flashing, press or to select warning bank 1 to 4.

Setting the Warning Alarm Altitudes

The setting of altitudes in each warning bank can be performed either on the ground or in the airplane during climb to jump altitude.

Three Warning Alarms

- Press  until 1st warning altitude flashes
- Press  or  to change 1st warning altitude
- Press  again and the 2nd warning altitude flashes
- Press  or  to change 2nd warning altitude
- Press  again and the 3rd warning altitude flashes
- Press  or  to change 3rd warning altitude




Two Warning Alarms

You can choose to only have two warning alarms. The procedure is the same as above, but choose same altitude for the 1st and 2nd warning alarms (the QUATTRO then sounds only the 2nd and 3rd warning alarms).

One Warning Alarm




If you want only one warning alarm, choose same altitude for all three warning alarms using the above procedure. (The unit sounds only the 3rd warning alarm).

Sound Pitch

Press  again. The musical note icon and pitch bar graph will begin to flash. Press  or  to change the pitch up or down. The pitch bar graph will display the number of bars corresponding to the selected pitch and the selected pitch will sound.

NOTE: When selecting a pitch on either side of the center vertical bar (3,800 Hz), the output volume decreases about 5 dB because the speaker is no longer at its optimum resonance frequency.




Sound Volume

Press  again. Press  or  to select output volume for all three canopy low speed warnings.

“1” is very low volume (112 dB),“10” is very high volume (117 dB) The QUATTRO is factory preset to “3”.

NOTE: In case of low battery capacity the volume will automatically switch to “1” and it cannot be changed until the batteries have been replaced.

Test Alarm Sounds

Press  again. The “Ear” icon will begin to flash. Press  or . This causes the QUATTRO to sound the preset alarm sequence at the selected pitch.

NOTE: When Canopy Descent is enabled, the LO SPD icon will show in the warning bank area of all warnings. To disable LO SPD, set all warnings to ---

Climb to Altitude Warnings and Altitude Offset Selector

Description

The altitude during climb at which the beep is heard may be changed or up to three different altitudes during climb may be selected for beep sounds. At the lowest preset altitude (factory preset to 1,000 feet), the QUATTRO sounds a sequence of beeps. These beeps have two functions:

1. The beeps indicate that the QUATTRO has calibrated itself to the local ground elevation and is ready to jump.

2. The number of beeps indicates the altitude at which the highest warning alarm is set; for example: If set to 4,500 feet, the signal will sound: beep-beep-beep-beep-(pause) beep. The number of rapid-sequence of beeps indicates the highest warning altitude in thousands of feet. The beep after a pause (if any), signifies a 500-foot altitude increment. Should the battery voltage of the QUATTRO show low capacity, the beep sequence is followed by 5 short beeps. This indicates that the batteries should be replaced.


NOTE: At the same time the output volume setting is automatically changed to low volume “1” and it cannot be changed until the batteries have been replaced. When the aircraft begins climbing to altitude, the QUATTRO displays the current altitude at the top of the display.

Setting










The setting of warning altitudes can be performed either on the ground or in the airplane during climb to jump altitude.

Setting Climb to Altitude Warnings and Altitude Offset

NOTE: Minimum selectable height is 1000 ft (300 meters) Note: Default values 1000 ft., --- ft., and --- ft. have been factory preset for Climb to Altitude Warnings.

In the Main Window mode, press  to access the Climb to Altitude Warnings and Altitude Offset Selector. Perform ACCESS in this window.

Three Warning Alarms

- Press  until 1st warning altitude flashes
- Press  or  to change 1st warning altitude
- Press  again and the 2nd warning altitude flashes
- Press  or  to change 2nd warning altitude
- Press  again and 3rd warning altitude flashes
- Press  or  to change 3rd warning altitude

Sequence of Climb Warning Alarm Altitudes


You may note that when setting the warning altitudes, it is possible to set the 1st warning alarm altitude lower than the 2nd or even the 3rd warning altitudes. The 2nd warning altitude could be set to a higher value than the 1st warning altitude or a lower value than the 3rd warning altitude, and so on. This is not a problem – when the QUATTRO exits ACCESS mode, it will automatically sort and store the warning alarms such that the highest warning altitude become the 1st warning alarm, the next highest warning altitude becomes the 2nd warning alarm, and the lowest warning altitude becomes the 3rd warning alarm.



One or Two Warning Alarms

If you wish only one warning alarm or two alarms, preset the not used alarm(s) to ---

Altitude Offset

Explanation: If the DZ elevation differs from that of the airport of takeoff, use the altitude offset capability to set the DZ elevation prior to entering the airplane or set the altitude offset to zero when climbing through the DZ elevation.

Press  again. The altitude (normally 0) next to the FT or MT indicator will begin to flash.

Press  or  to set an altitude offset to match the altitude of the landing DZ relative to the takeoff airport.

NOTE: When performing manual altitude offset the QUATTRO enters Jump Mode and retains the altitude offset for 14 hours, if no jump is made. After 14 hours the QUATTRO recalibrates to the field elevation where it is currently located and once again displays 0. The altitude offset is not retained when the QUATTRO is powered OFF.

OPERATIONAL CONSIDERATIONS

Prior to Jumping

The QUATTRO continually adjusts to the local elevation and displays 0 FT (MT) at the top of the display. If the top of the display does not show “0” (or your selected altitude offset) prior to jumping, the unit has not adjusted itself to the local elevation and it must be manually zeroed. See the section, “Altitude Offset Function” under Menu functions above. Even when the display turns OFF, the unit is still ready for jumping.

Setting an Altitude Offset

If the drop zone (DZ) elevation is different from that of the takeoff airport, you may compensate for this difference by setting an Altitude Offset – see the Altitude Offset menu function described above.

Battery Status

Full capacity: Symbol shows two black bars inside the battery icon.

Half capacity: Symbol shows one black bar inside the battery icon.

Low capacity: Symbol shows no black bars, just an “empty” battery icon. Batteries should be replaced as soon as possible.

As a reminder, 5 short beeps sound when climbing through the lowest preset climb altitude. At the same time the output volume setting is automatically changed to low volume “1”. Empty batteries: The battery icon flashes. Replace batteries immediately.

Mounting the QUATTRO

The QUATTRO can be mounted on the outside of the helmet. Loop the wax cord through the four mounting holes and fasten with knots to the helmet.

NOTE: Make sure that there is no material between the QUATTRO loudspeaker hole and your ear.

Resetting the QUATTRO



Press a paperclip into the tiny hole on the rear side of the unit and release. The unit restarts.

NOTE: Reset the unit after battery replacement, when trouble-shooting and when verifying software version number.

Air Filter

The QUATTRO is water resistant. The Air Filter is the white circular part mounted on the side of the unit. If it becomes wet (after a splash in the swoop pond) then let the QUATTRO dry in a warm place for 48 hours.

NOTE: The Air Filter must be replaced if jumping is resumed quickly or if the QUATTRO has been submerged into water. Air Filter removal tooling kit is an accessory which can be purchased separately.

QUATTRO Firmware Version

Perform reset. The version number is displayed at the upper part of the screen (altitude area). The numbers displayed in the middle of the screen is a factory reference number.

Battery replacement




Carefully remove screw from battery cover and remove batteries. Install new batteries and note polarity. Use only Renata CR-2325.

NOTE: Reset the QUATTRO after replacing batteries. Customer settings are kept in non-volatile memory when removing batteries. However, the built-in clock may again be set to the correct time.

Trouble-shooting

When the QUATTRO detects a fault, an error (“ERR”) sign and troubleshooting number 2 to 4 are displayed in the upper part of the screen. At the same time the unit beeps every minute.

The “ERR” trouble shooting codes are as follows: ERR 2, ERR 3, ERR 4 = unit is defective. Remedy: perform reset

If the unit does not function correctly even after replacing batteries and pressing reset, perform following: Press  and hold while resetting. The QUATTRO resets to factory settings and sounds three beeps. If the unit is still faulty, please contact your local dealer or LARSEN & BRUSGAARD.

SPECIFICATIONS

Dimensions: 52 x 40 x 12 mm (2.16 x 1.57 x 0.47 inches)
Weight: 26 grams (0.9 oz.)
Battery type: 2 x Renata CR 2325
Battery Life Time: 2.5 years or 500 jumps

Freefall alarm sounds:
1st warning:
One 1.5 second pulsating alarm if vertical airspeed exceeds 13 m/ sec at preset altitude. Sound sequence: Pulsating, low repetition.
2nd warning:
One 3 second pulsating alarm if vertical airspeed exceeds 13 m/ sec at preset altitude. Sound sequence: Pulsating, low repetition.
3rd warning:
One 4 second pulsating alarm if vertical airspeed exceeds 13 m/sec at preset altitude. Sound sequence: Pulsating, high repetition.
4th warning:
Siren alarm as long as vertical airspeed exceeds 13 m/sec at or below the preset altitude. After deployment the trigger speed switches to 35 m/sec.
Sound sequence: High pitch continuous siren.
Track Guide:
0.5 second beeps between 1st and 2nd warning.

Low Speed alarm sounds:
1st warning: One 0.2 second beep
2nd warning: Two 0.2 second beeps
3rd warning: One 1.3 second beep

Climb to Altitude Warnings: Two 0.2 second beeps

Alarm output volume:
117 dB at maximum volume “10”
112 dB at minimum volume “1”

Freefall alarm calibration range: 1,000 to 19,900 feet (300 to 6,000 meters)

Low speed alarm calibration range: 100 to 9,990 feet (30 to 3,330 meters)

Climb to Altitude calibration range: 1000 to 9,990 feet (300 to 3,330 meters)

Altitude selection interval: 10 feet (10 meters)

Operating altitude: 0 to 40,000 feet

Accuracy: +/- 1.2%
Operating Temperature Range: -20° C to +50° C (-4° F to +122° F)

Meets or exceeds EEC/89/336

L&B part no.: 205222

NATO Stock no.: 6605-22-609-1694